




DESCRIPTION:

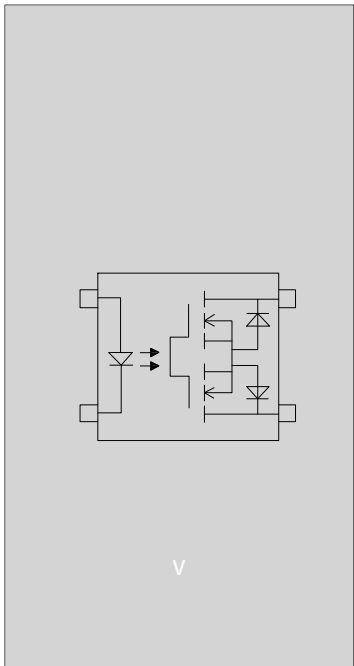

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit



--	--	--	--

NOTE1: 100 μ s pulse, 100Hz frequency

NOTE2: AC for 1 minute, R.H.=40~60%


ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

Recommended Operating Conditions

Characteristics	Symbol	Min.	Typ.	Max.	Unit

ORDERING INFORMATION

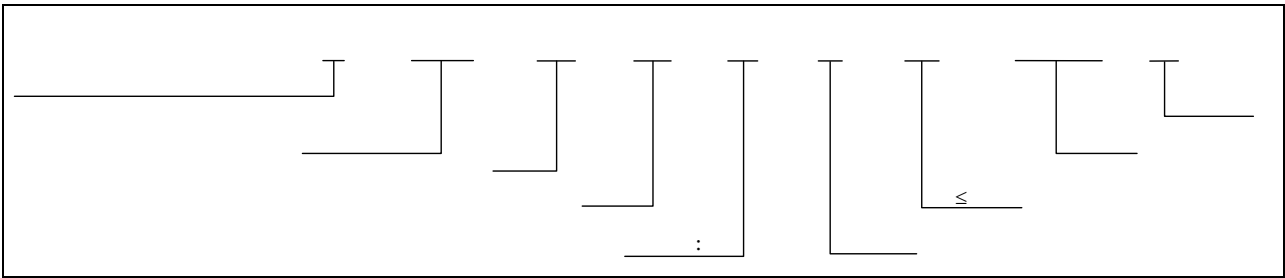

Packing Quantity	
Option	Quantity
SSON4	2500 Units/Reel

Characteristics Curves

FIG.1:

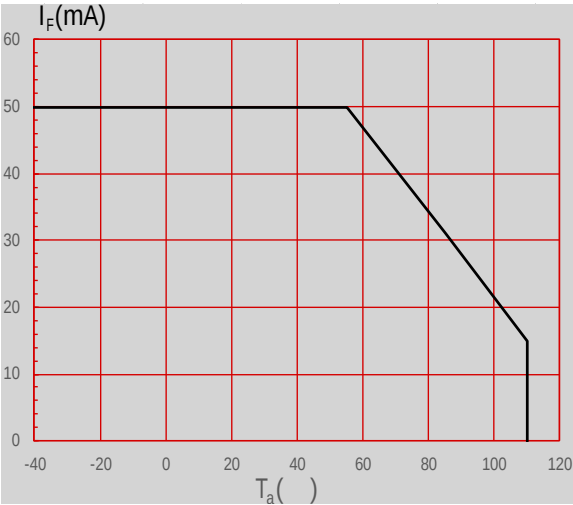


FIG.2:

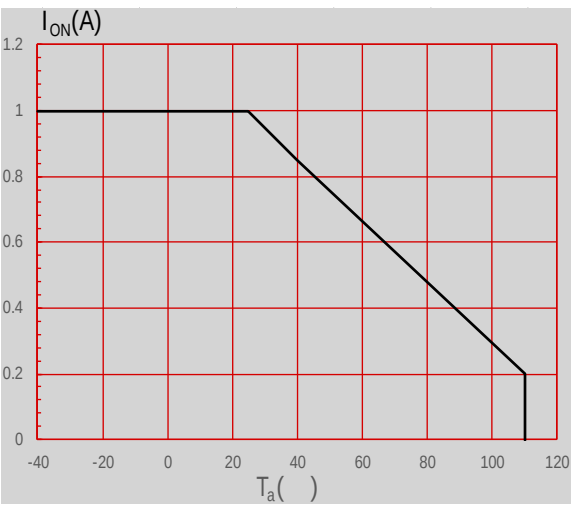


FIG.3:

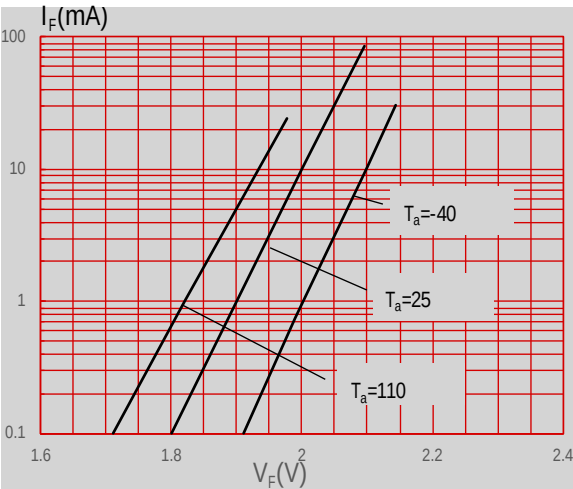


FIG.4:

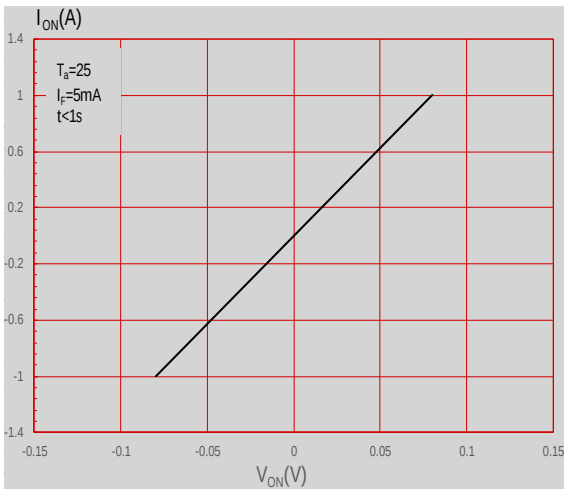


FIG.5:



FIG.6:

FIG.7:


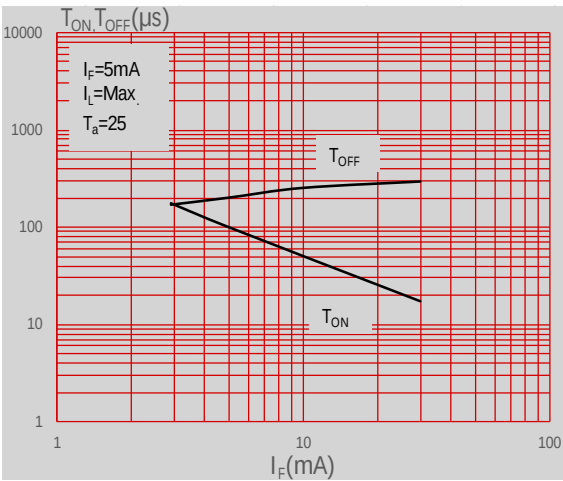



FIG.8:

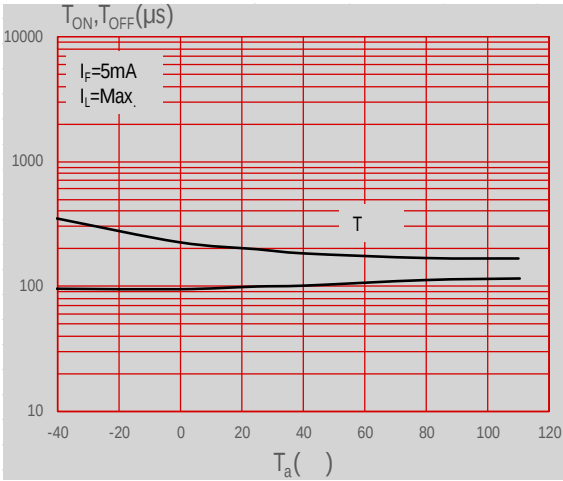


Technical drawing of a mechanical part showing three views: front, top, and side. The front view shows a rectangular block with a horizontal slot. The top view shows the block's footprint with a vertical slot. The side view shows the block's profile with a vertical slot and a horizontal slot. Dimensions are indicated by blue arrows and numbers.

[illegible]

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

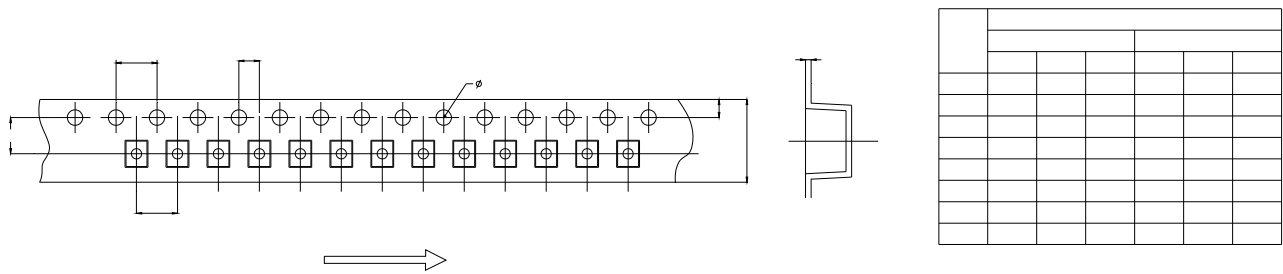

REFLOW INFORMATION

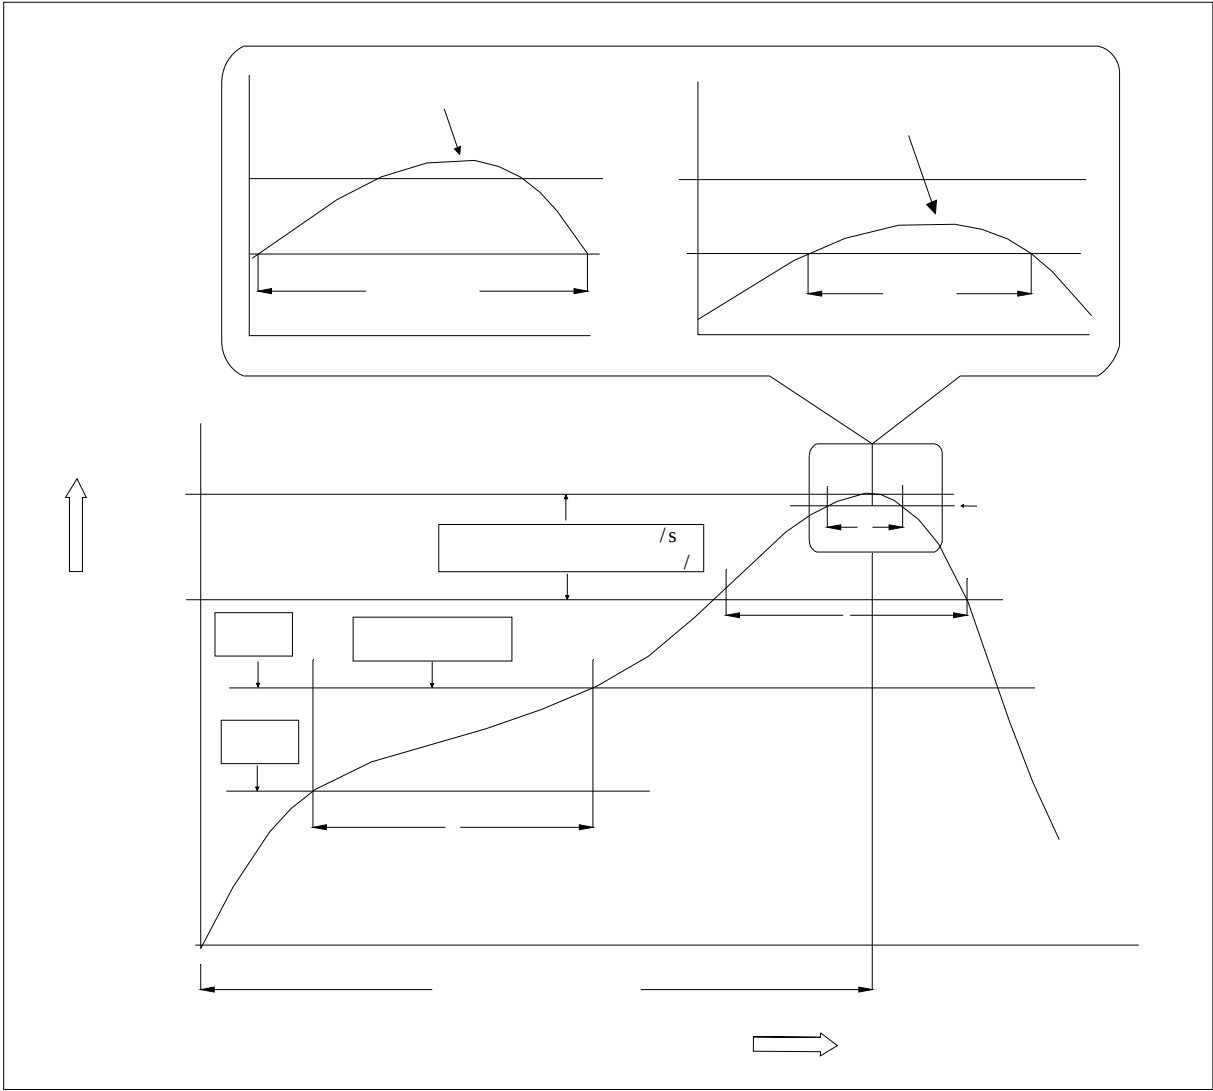

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile

