



JMG200HF12G2S1

Features

-
- Low Stray Inductance
- Low Saturation Voltage
- Ultra Low loss
- HI-REL Power Terminals
- Lead Free, Compliant with Ro

Product Summary



JMG200HF12G2S1

IGBT

**FRED Absolute Maximum Ratings (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)**

Parameter	Conditions	Symbol	Values	Unit
Repetitive peak reverse voltage	$T_{vj} = 25^\circ\text{C}$	V_{RRM}	1200	V
Continuous DC forward current		$I_{F(AV)}$	200	A
Repetitive peak forward current	$t_P = 1\text{ms}$	I_{FRM}	400	A

FRED Electrical Characteristics (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)



Parameter	Conditions		Symbol	Values			Unit
				Min.	Typ.	Max.	
Forward voltage	I _F 200A	T _{vj} = 25°C	V _F		2.00	2.30	V
		T _{vj} = 125°C			1.60		
Peak reverse recovery current	I _F 200A, di/dt = 110 V _R = 600V, V _{GE} = -15V	T _{vj} = 25°C	I _{RM}		39.4		A
		T _{vj} = 125°C			63.7		
Recovered charge		T _{vj} = 25°C	Q _{rr}		7.09		
		T _{vj} = 125°C			19.1		
Reverse Recovery energy		T _{vj} = 25°C	E _{rec}		2.04		mJ
		T _{vj} = 125°C			5.27		
Thermal resistance, junction to case	per Diode		R _{th(j-c)}			0.2	K/W
Temperature under switching conditions			T _{vj op}	-40		150	°C

**Module Characteristics**

Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	
Isolation voltage (All terminals shorted)	f = 50Hz, 1minute	V _{iso}	2.5			kV
Maximum junction temperature		T _J			175	°C
Thermal resistance, case to heatsink	per module	R _{th(c-s)}		0.01		K/W
Storage temperature		T _{stg}	-40		125	°C
Mounting torque	M6	M	2.5		5.0	N·m
Terminal connection torque	M6	M	3.0		6.0	N·m

Ordering Information

Device	
--------	--

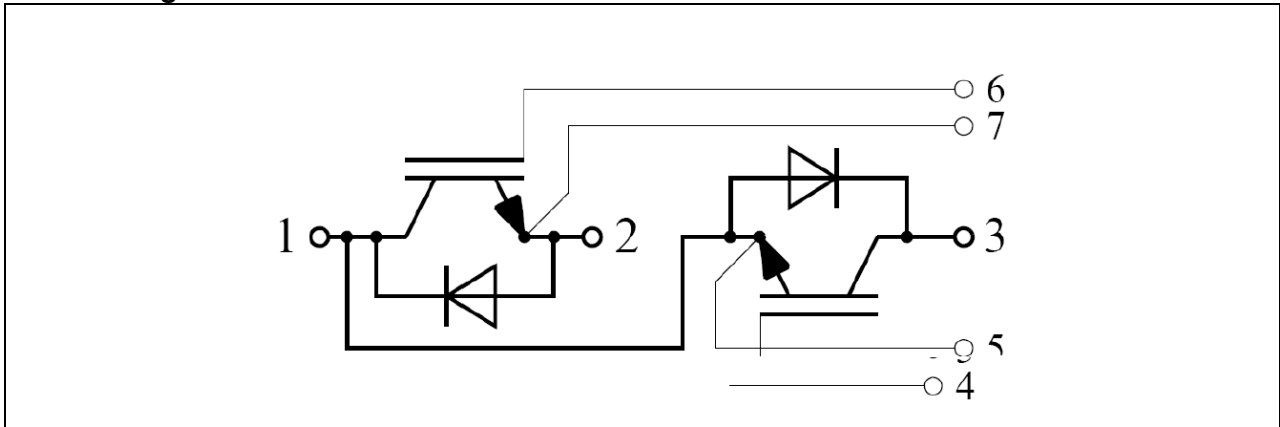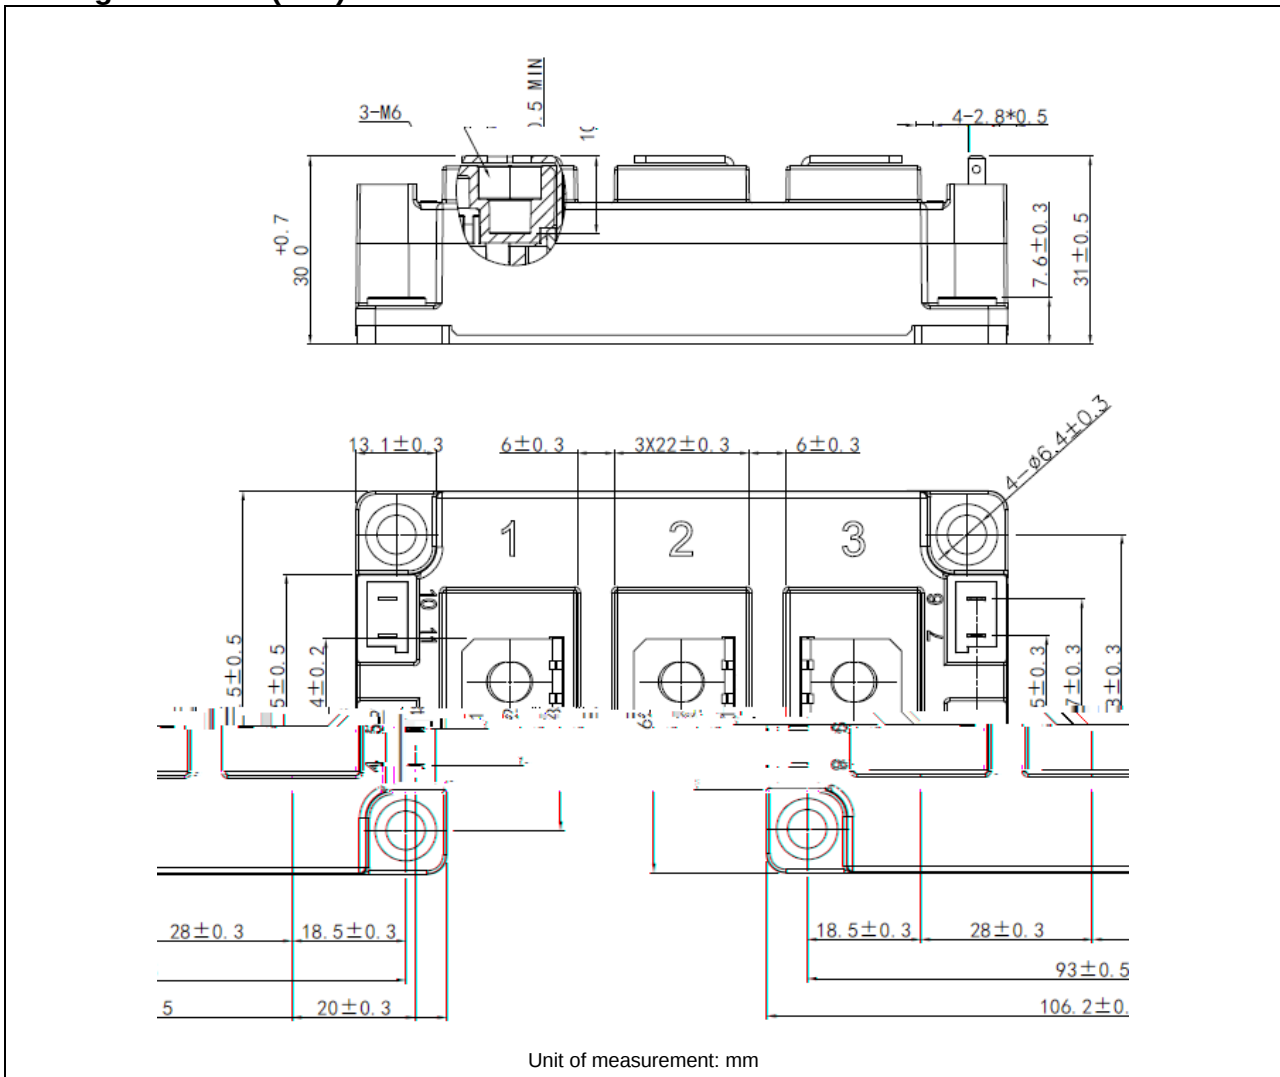Circuit Diagram

Package Outlines (mm)




Typical Electrical & Thermal Characteristics

Fig 1. IGBT Output Characteristics
Inverter (typical) $V_{GE}=15\text{ V}$

Fig 2. IGBT Output Characteristics
Inverter (typical)

Fig 3. IGBT Transfer Characteristics
Inverter (typical) $V_{CE}=20\text{ V}$

Fig 4. IGBT Switching Loss vs I_c
Inverter (typical)
 $R_g=6.9$ $V_{CE}=600\text{ V}$, $V_{GE}=\pm 15\text{ V}$

Fig 5. IGBT Switching Loss vs. R_g ,
Inverter (typical)
 $I_c=200\text{ A}$, $V_{CE}=600\text{ V}$, $V_{GE}=\pm 15\text{ V}$

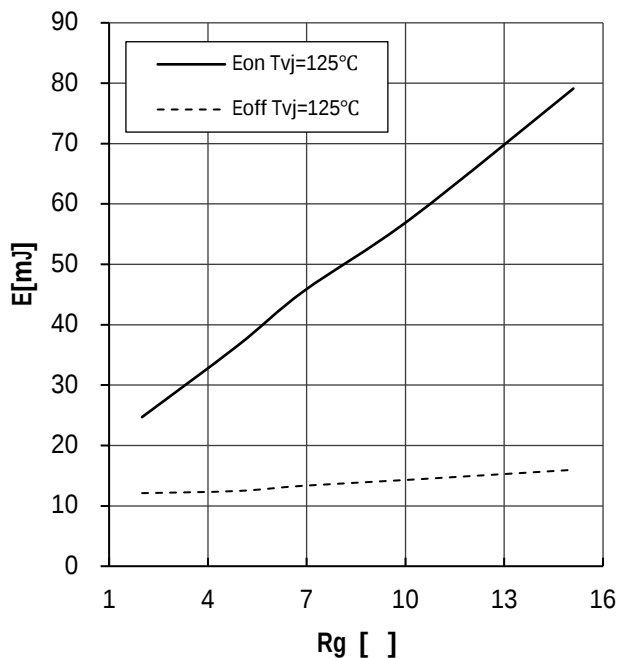


Fig 6. Reverse bias safe operating area
IGBT, Inverter (RBSOA)

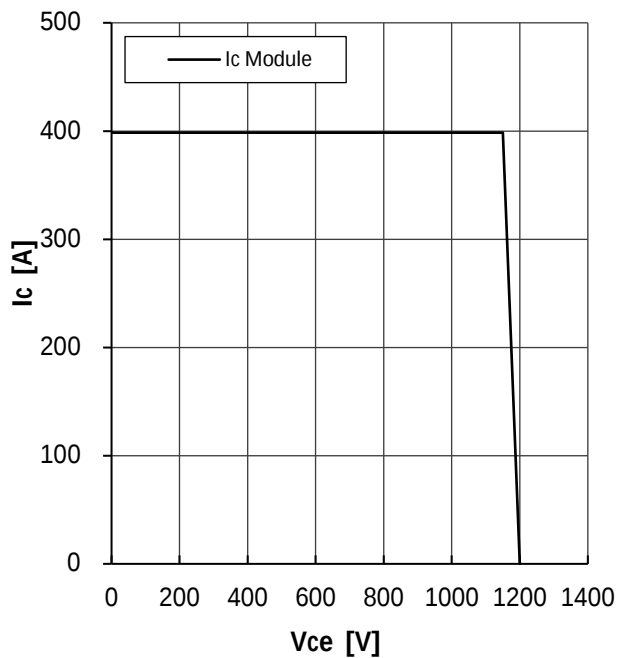


Fig 7. FRED Forward Characteristics,
Inverter (typical)

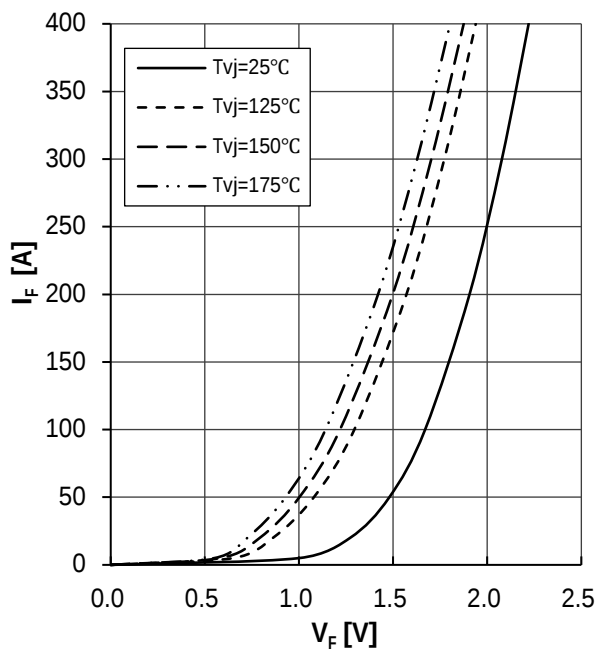


Fig 8. FRED Switching Loss vs. I_c ,
Inverter (typical)
 $R_g=6.9$ $V_{CE}=600\text{ V}$


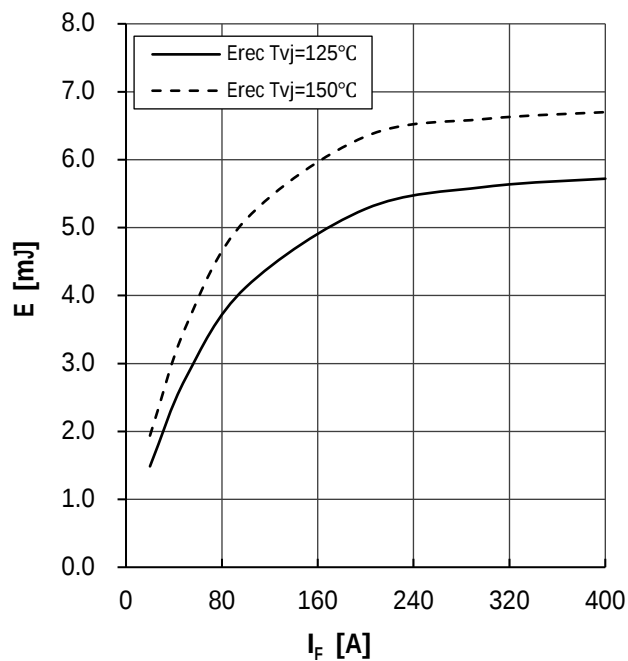


Fig 9. FRED Switching Loss vs. R_g ,
Inverter (typical)
 $I_c=200$ A, $V_{CE}=600$ V



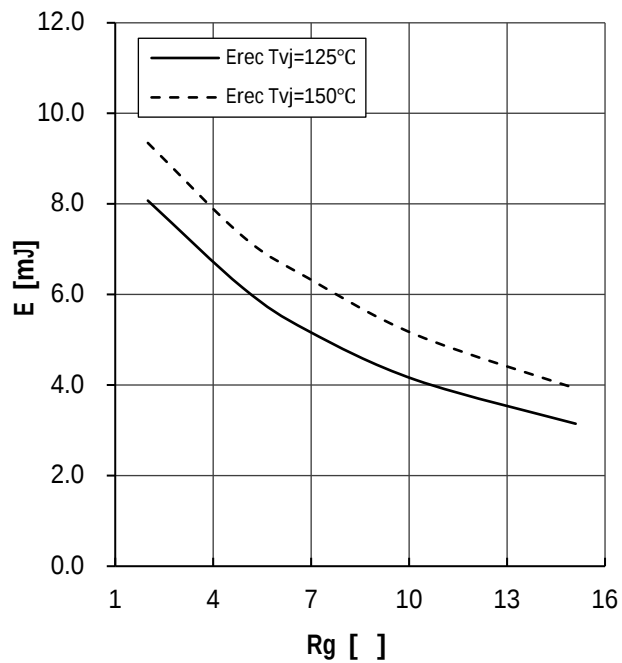

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Semiconductor Co., Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. This information in this document is subject to change without prior notice. Notwithstanding this, Jiangsu JieJie will fully comply with the terms outlined in a signed agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document is the initial release, dated 25 August 2026. This document supersedes and replaces all information previously supplied.

 is registered trademark of Jiangsu JieJie Semiconductor Co., Lt ©2026 Jiangsu JieJie Semiconductor Co., Ltd. All rights reserved.