



11-03

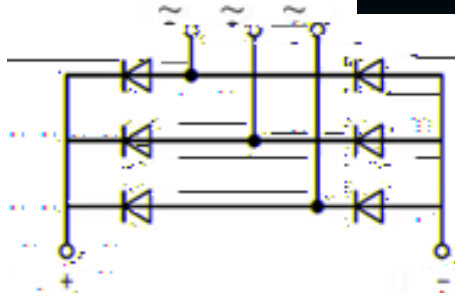
[illegible]





FIG.1: Forward characteristics(per diode)


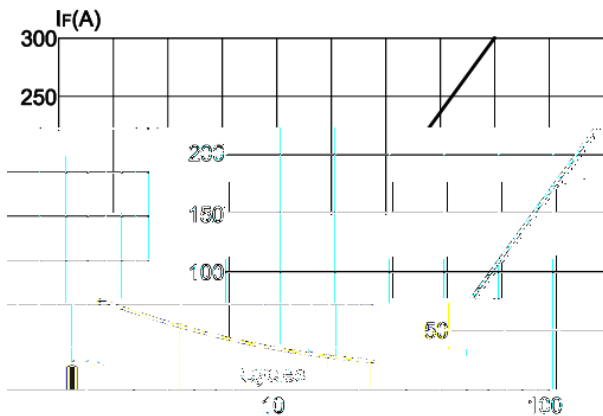


FIG.2: Peak on-state surge current

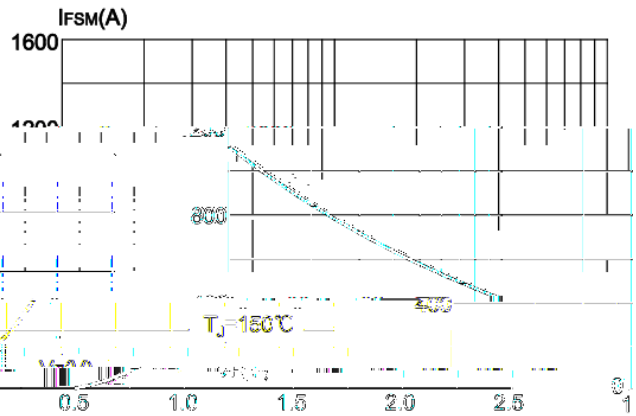

G.4: Maximum transient thermal impedance
 $r_{th(j-c)}$ ($^\circ\text{C/W}$) Junction-to-case(per diode)

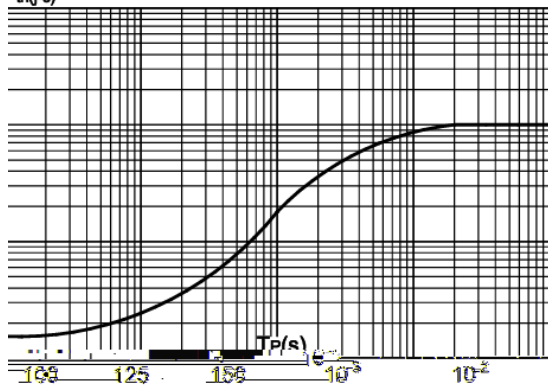


FIG.3: Forward current vs. case temperature

