



C & J)


J F W H Y C b

W

F Y I W

FWW	LWb	K

bYW

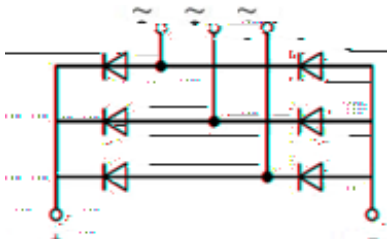

X b CW HW

FWW		I X b	LWb	K
	°C			
	°C			
				°C
				°C



C & J)

b Y YWb WWW Y

FWW		I X b	LWb			K
			C	J	CW	
	°C					
	°C					
	°C					
	°C					

J Wb WWW Y

FWW		I X b	LWb			K
			C	J	CW	
						°C

E W

Y	CWa	FWaW	M		F W

J YW b Y YW J W W W Y

FIG 1: Forward characteristics(per diode)

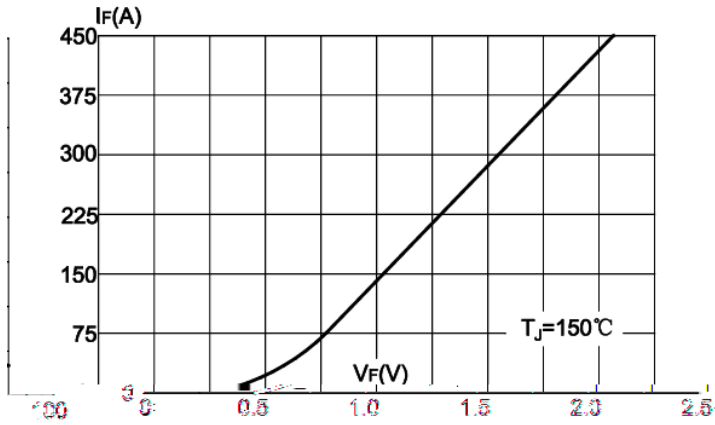


FIG 2: Peak on-state surge current


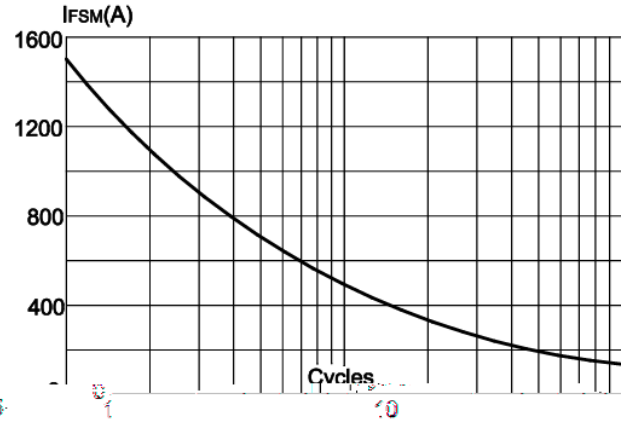



FIG 3: Forward current vs. case temperature

FIG 4: Maximum transient thermal impedance

Y W W

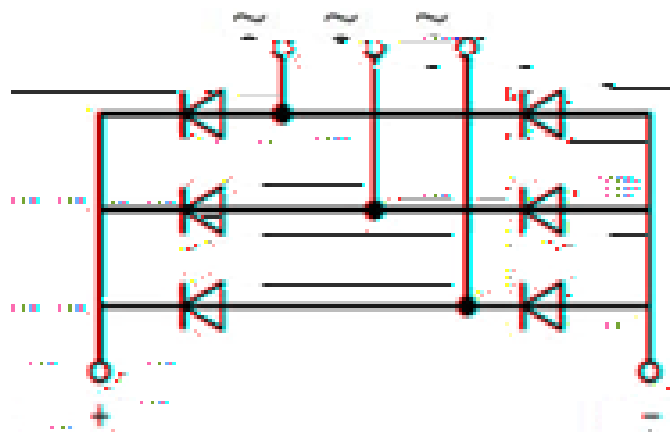

FWaW E b

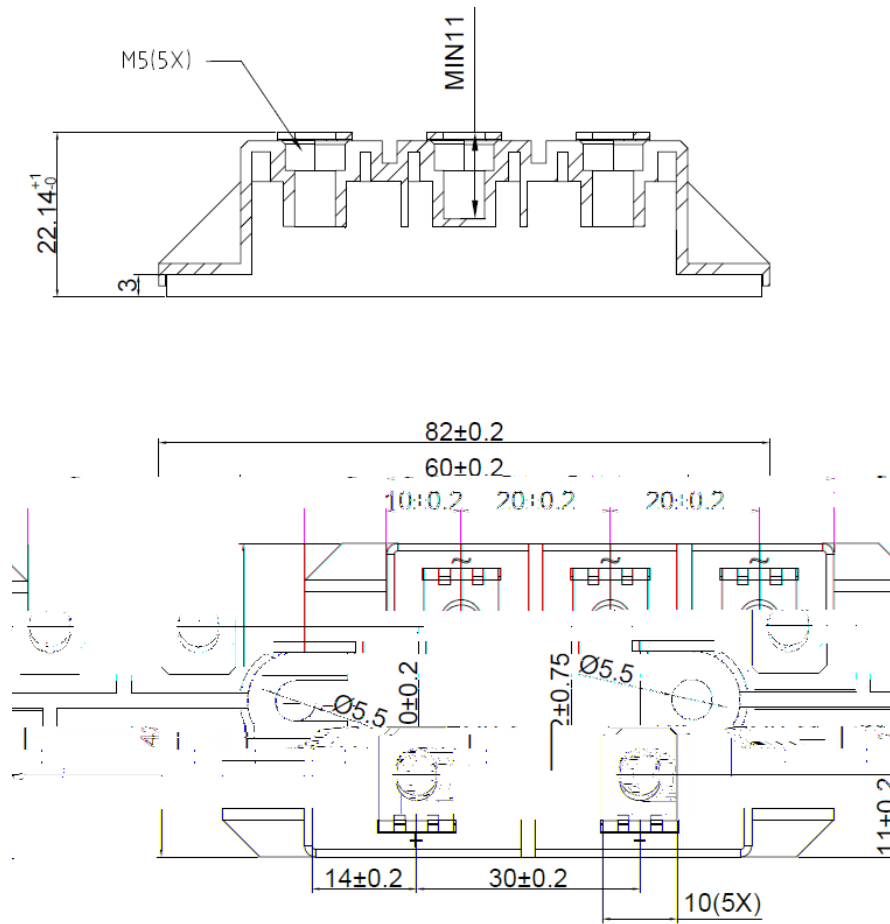



C & J)

