

	°C			
	°C			
				°C



	°C					
	°C					
	°C					
	°C					

FIG.1: Forward characteristics(per diode)

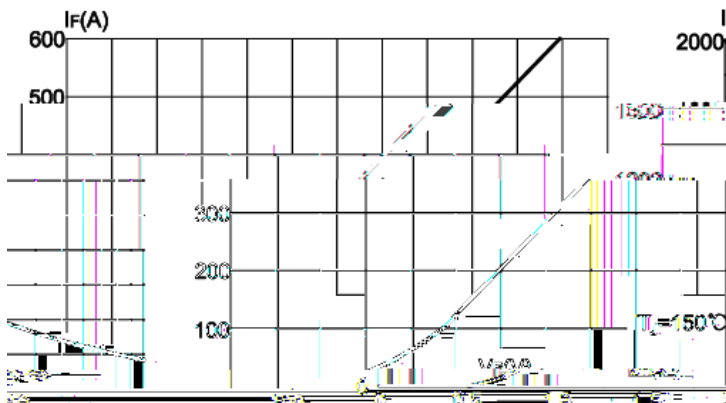


FIG.2: Peak on-state surge current

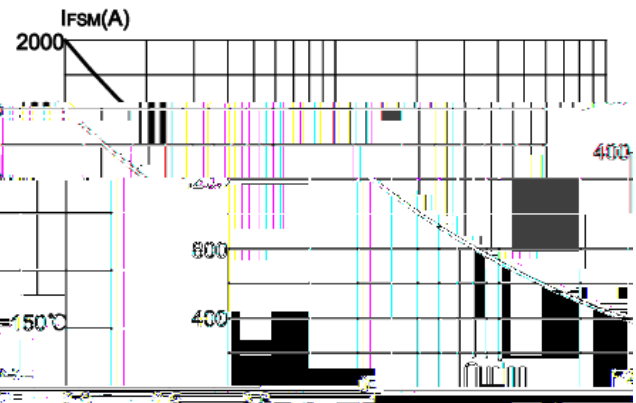


FIG.3: Forward current vs. case temperature

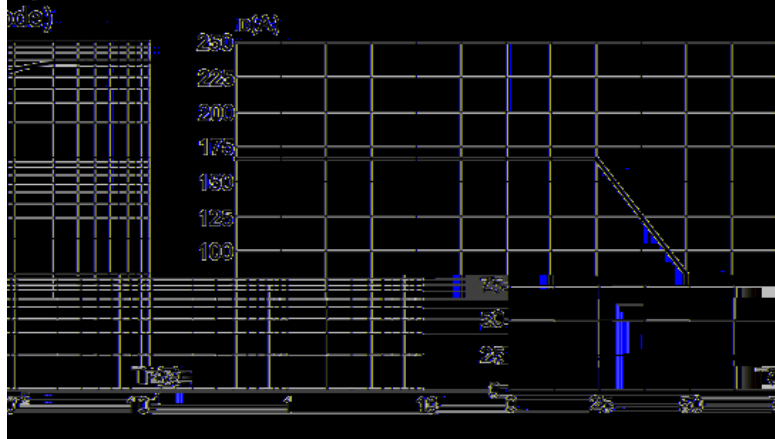


FIG.4: Maximum transient thermal impedance (Zthja) vs. Pulse width (t) for a diode

