



" ! ")

2

2

	°C			
	°C			



6

	°C					
	°C					
	°C					
	°C					

6

FIG.1: Forward characteristics(per diode)


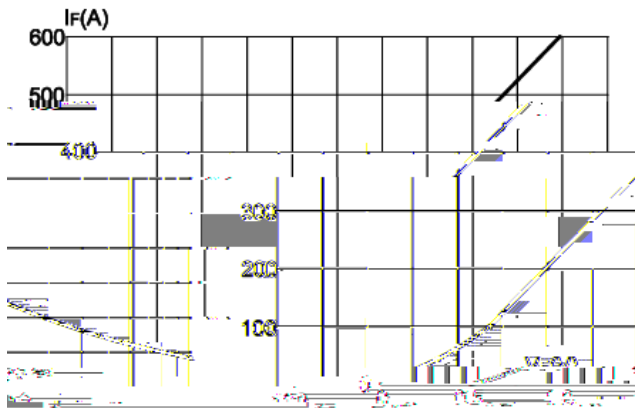


FIG.2: Peak on-state surge current

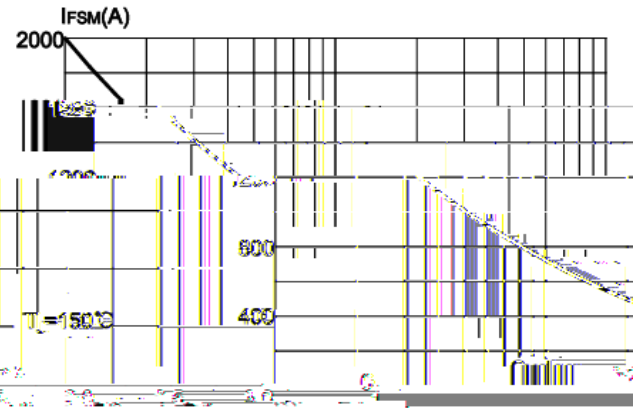

Transient thermal impedance to-case(per diode)

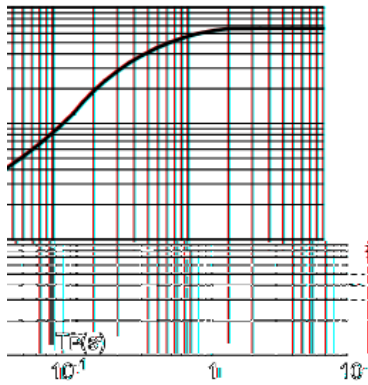


FIG.3: Forward current vs. case temperature



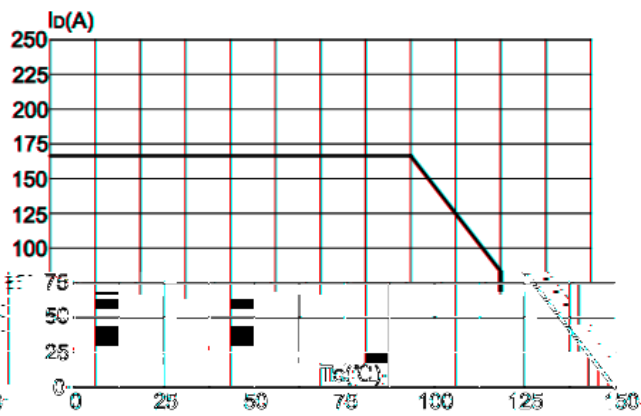


FIG.4: Maximum transient thermal impedance



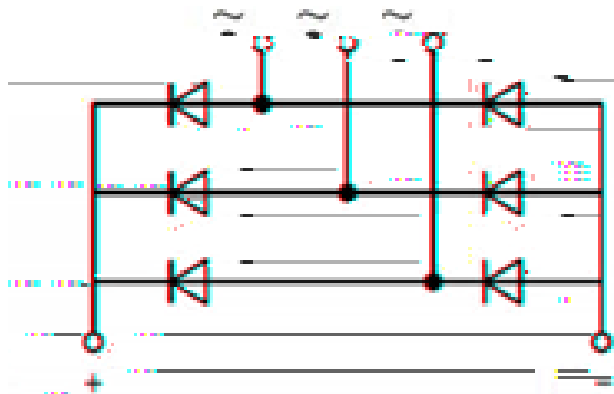

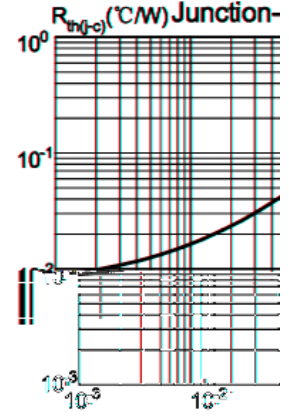

" ! "

