

	°C			
	°C			
				°C



	°C					
	°C					
	°C					
	°C					



FIG.1: Forward characteristics(per diode)


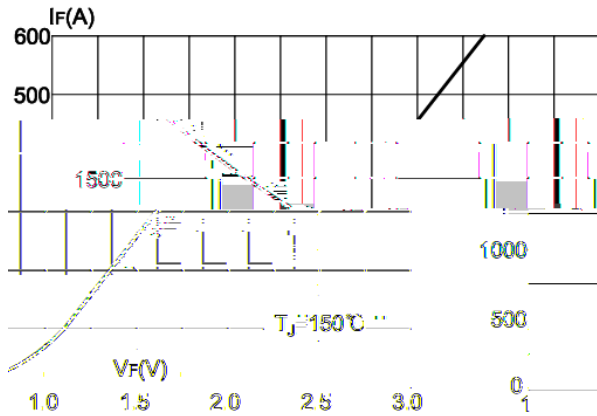


FIG.2: Peak on-state surge current

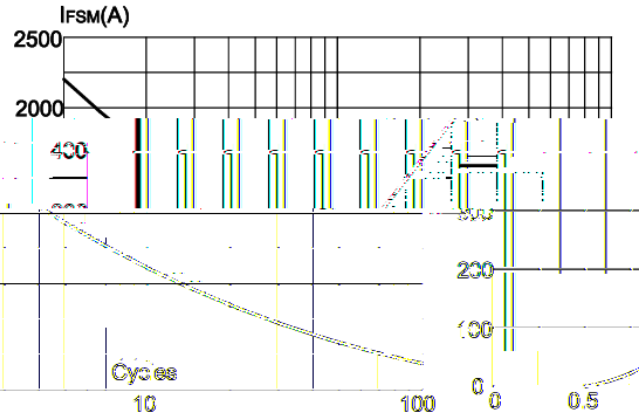

Forward current vs. case temperature

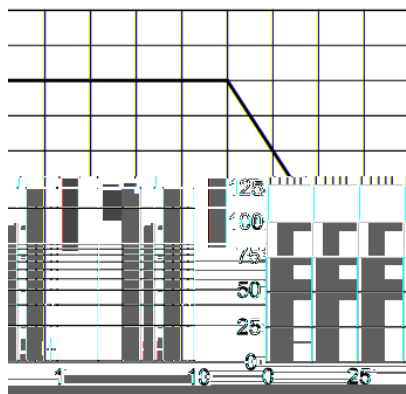


FIG.4: Maximum transient thermal impedance
 $R_{th(j-c)}$ ($^\circ\text{C/W}$) Junction-to-case(per diode)

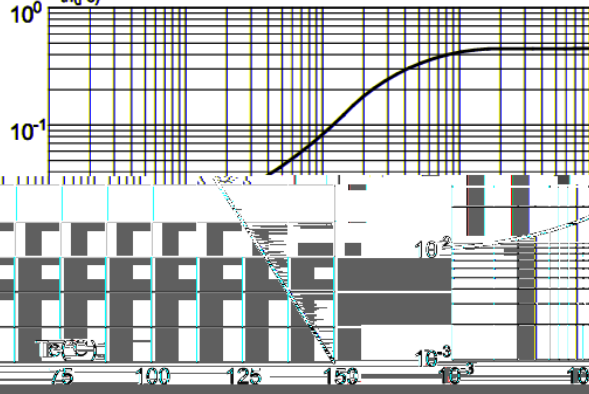


FIG.3: Forward current vs. case temperature

