



BE ((L (

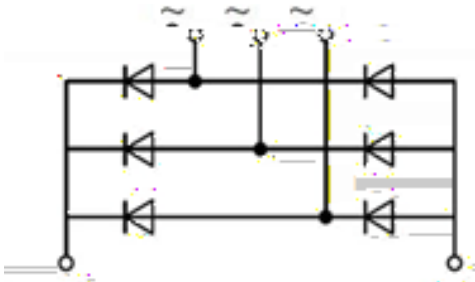
L H Y J E

Y

H K Y

HY Y	Y	M

Y



EY JY

HY Y		K	Y	M
	℃			
	℃			
				℃



Y YY

HY Y		K	Y			M
			E &	L &	EY &	
	°C					
	°C					
	°C					
	°C					

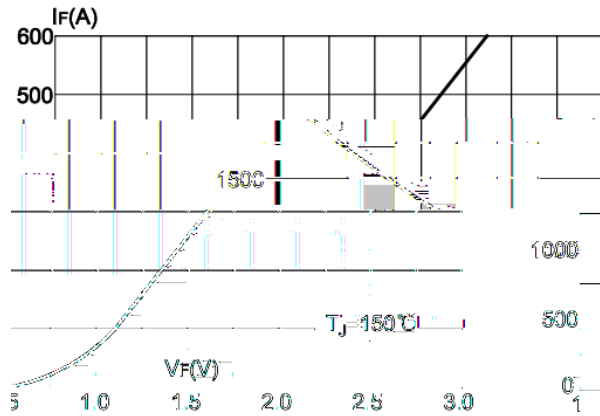
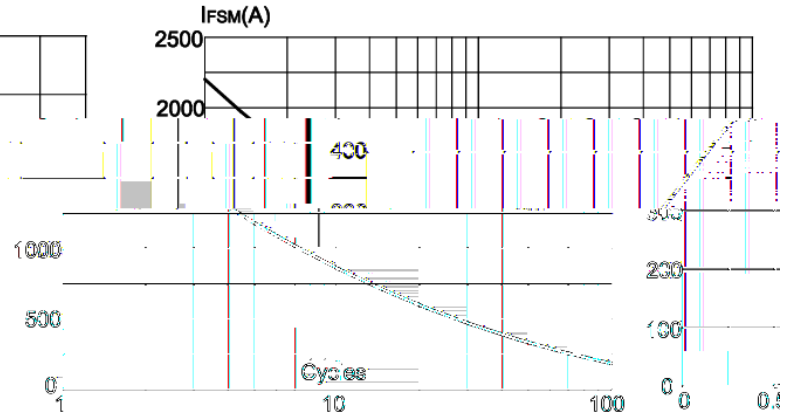
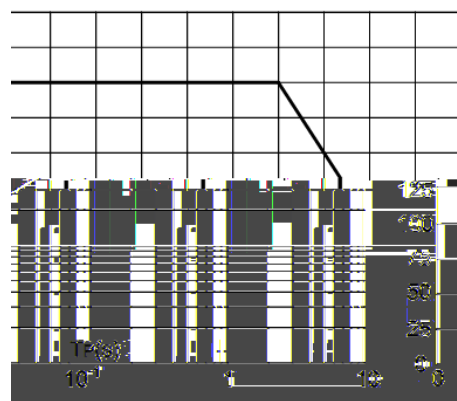
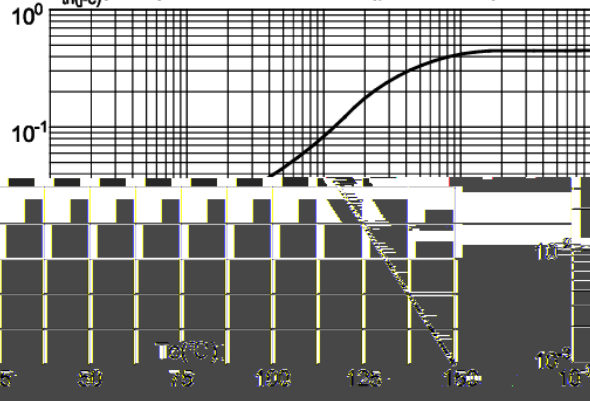
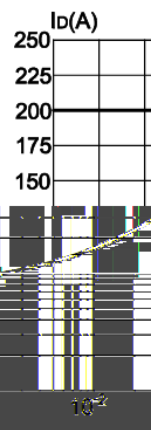
L Y YY

HY Y		K	Y			M
			E &	L &	EY &	

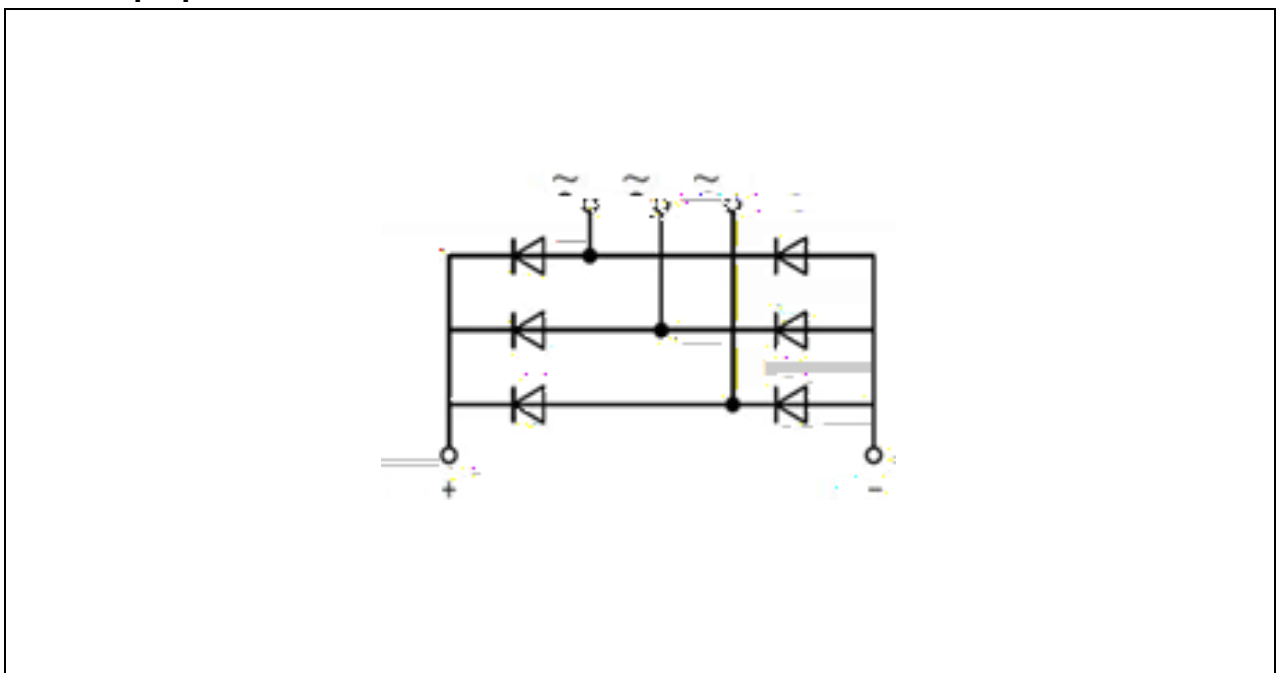
G A Y

	EY	HY Y	O	A	H Y

L Y Y L Y Y Y

FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance
 $R_{th(j-c)}$ (°C/W) Junction-to-case(per diode)

FIG.3:


Y Y





BE ((L (



