

	°C			
	°C			
				°C



	°C					
	°C					
	°C					
	°C					

						°C

FIG.1: Forward characteristics(per diode)

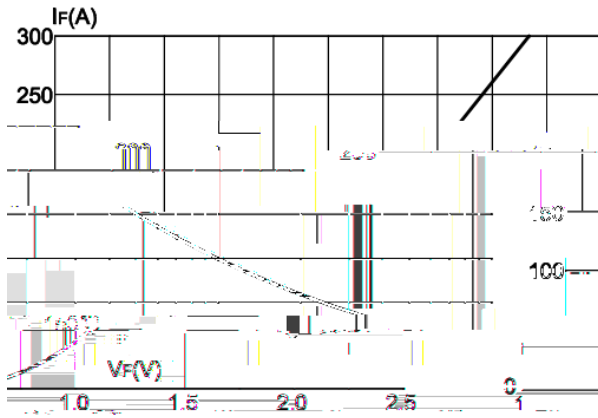


FIG.2: Peak on-state surge current

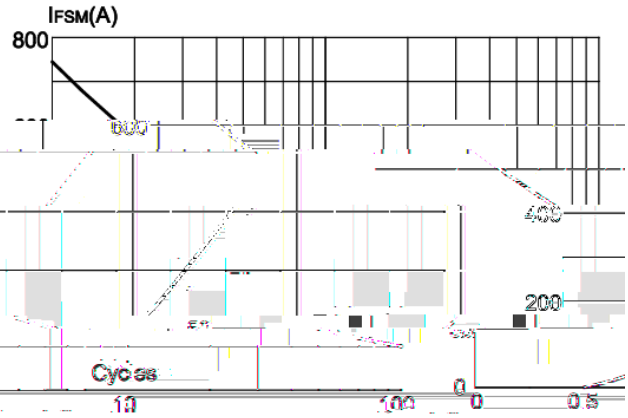


FIG.3: Junction-to-case thermal resistance

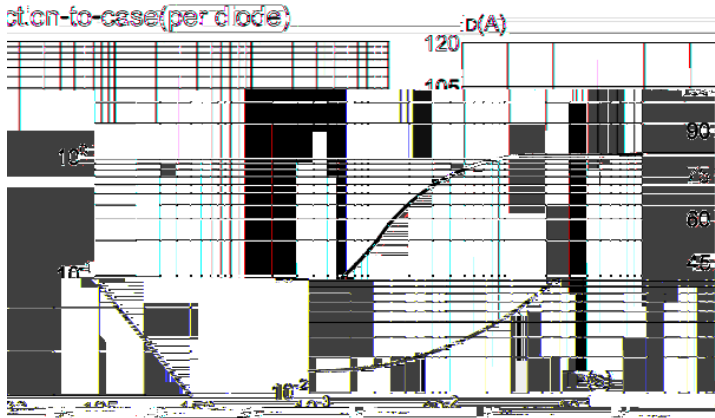


FIG.4: Maximum allowable junction temperature

